

SETUP SHEET


TRACK CONDITIONS

Type : ☒ Carpet ☐ Asphalt
Place : ☐ Indoor ☐ Outdoor
Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Size: ☐ Open ☒ Med. ☒ Tight
Traction: ☐ High ☒ Med. ☒ Low
Track Temp/Air Temp: 20° / 20°
Note:


FRONT SUSPENSION

Track Width: 186 mm ☐ Gear Diff _____ wt
Toe Angle: +1° ☐ Ball Diff _____
Caster: 4° ☐ One Way _____
Camber: -2 ☒ Spool _____
Ride Height: 5 mm Anti-Roll Bar: Ø 1.3 mm
~~Down Stop:~~ 6.2 mm

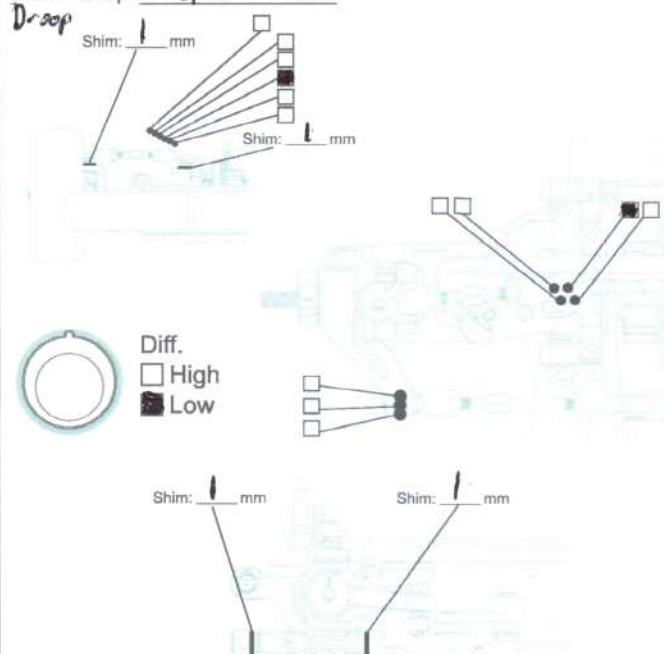

REAR SUSPENSION

Track Width: 189 mm ☒ Gear Diff 4000 wt
Toe Angle: -3 ☐ Ball Diff
Camber: -2 ☐ Spool
Ride Height: 5.2 mm
~~Down Stop:~~ 4.8 mm Anti-Roll Bar: Ø 1.2 mm

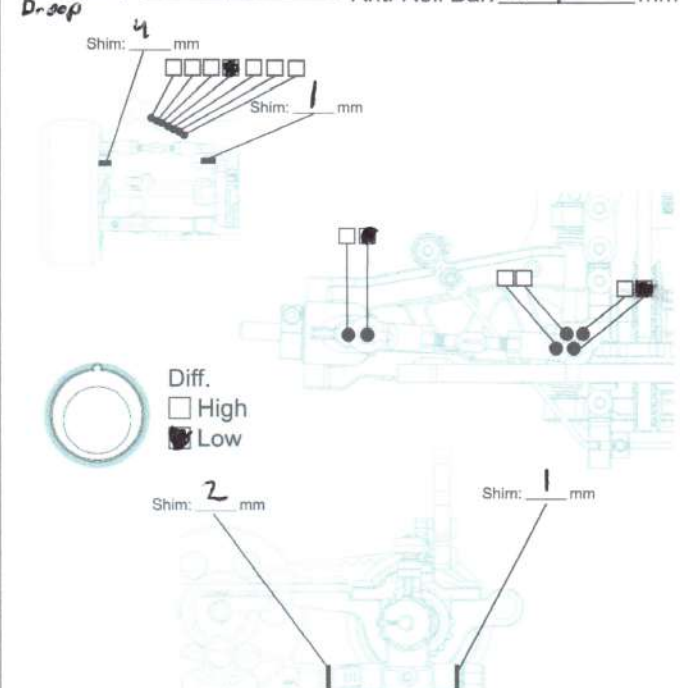

【答案】D

(+)   (-) (-)   (+)

0,2   0,2

 0,4  0,4

(+)   (-) (-)   (+)

RFL 0,4 RFR
RRL 0,2 RRR

ELECTRONICS


Servo: Savix
ESC: Hooby mung
Battery: LiPo 5600

DRIVE RATIO


$$\frac{\text{Spur } 100}{\text{Pinion } 38} \times \frac{T}{T} \times 1.9 = 5,0$$

Tires

Insert : _____
Wheel : _____
Shore/deg : _____
Compound : _____
Tire Temp : _____
Tire additive : _____
Treated Area _____



SHOCKS



Hole Size: F 1.1 R 1.1
Holes In Piston: F 3 R 3
Oil wt: F 400 R 400
Springs: F 29 R 25
Rebound: F No R No
Bladder Note: _____

Thread Length: F _____ R _____

2003



Body: _____
Wing Height: _____
Wing Position: _____

MOTOR

Brand: Reds
Turns: 13.5
Timing: 320

150

Punch: _____
Initial Brake: _____
Drag Brake: _____
☐ ESC Timing ☐ Turbo Timing
Blinks