

SETUP SHEET

TRACK CONDITIONS

Type : ☐ Carpet  Asphalt


Place : ☐ Indoor  Outdoor

Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Size: ☐ Open  Med. ☐ Tight
Traction: ☐ High  Med. ☐ Low
Track Temp/Air Temp: 24° / 22°
Note:


FRONT SUSPENSION

Track Width: 186 mm ☐ Gear Diff _____ wt
Toe Angle: 71° ☐ Ball Diff _____
Caster: 4° ☐ One Way _____
Camber: -2° ☒ Spool _____
Ride Height: 5 mm Anti-Roll Bar: Ø 1.3 mm
~~Down Stop:~~ 6.2 mm

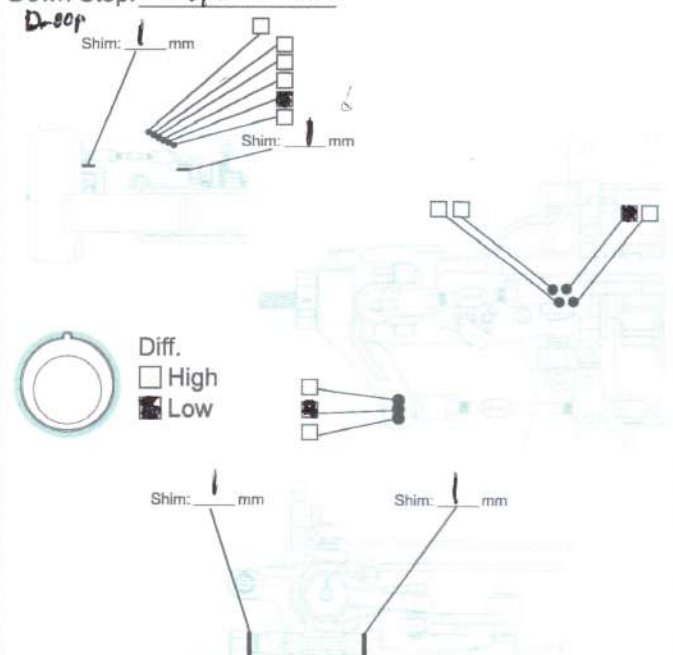

REAR SUSPENSION

Track Width: 189 mm ☒ Gear Diff 4000 wt
Toe Angle: -3° ☐ Ball Diff
Camber: -2 ☐ Spool
Ride Height: 5.2 mm
Down Stop: 4.8 mm Anti-Roll Bar: Ø 1.2 mm

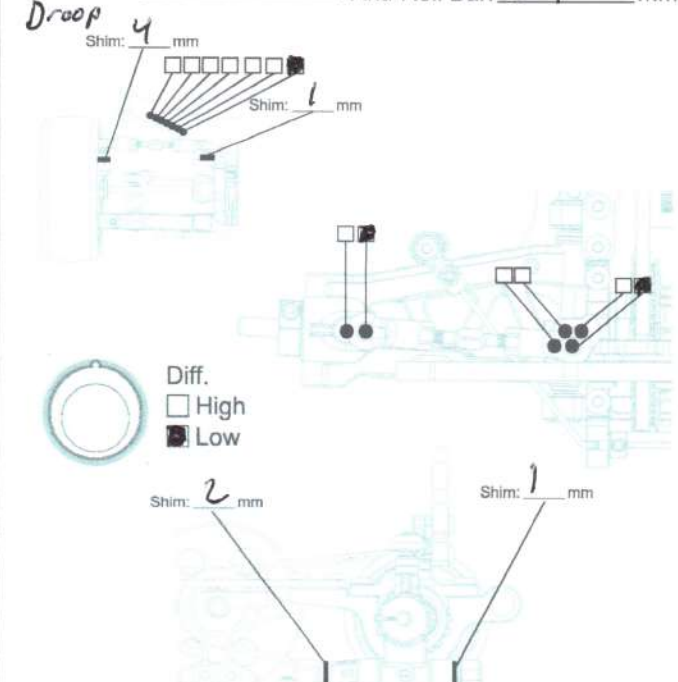

Answers

(+)  FFL  (-) (-)  FFR  (+)

0,2  _____  0,2

 0,4  0,4

(+)   (-) (-)   (+)

RFL 0,4 RFR 0,4
RRL 0,2 RRR 0,2

BOOKS

Servo: Servo x
ESC: Hooby wing
Battery: CRP 5600

MOTOR

Brand: Redg
Turns: 13.5
Timing: 32°

ESQ


Punch: _____
Initial Brake: _____
Drag Brake: _____
☐ ESC Timing ☐ Turbo Timing
Blink

DRIVE RATIO


$$\frac{\text{Spur } 100}{\text{Pinion } 38} \times \frac{T}{T} \times 1.9 = 5.0$$

TIRES

Insert : _____
 Wheel: _____
 Shore/deg : _____
 Compound: _____
 Tire Temp: _____
 Tire additive: _____
Treated Area



SHOCKS



Hole Size: F 1.1 R 1.1
Holes In Piston: F 3 R 3
Oil wt: F 400 R 400
Springs: F 29 R 23
Rebound: F No R No
Bladder Note: _____
Thread Length: F _____ R _____

BODY



Body: _____
Wing Height: _____
Wing Position: _____