

Mayako SETUP SHEET v.1.2 - UPPER LINKS


TRACK **Any** SURFACE ☐ DUSTY ☐ BLUE GROOVE ☐ LOW GRIP ☒ MEDIUM GRIP ☐ HIGH GRIP
 RACE _____ DATE _____ CONDITION ☐ SMOOTH ☐ BUMPY ☒ 50/50 ☐ CLAY ☐ GROOVE WITH DUST ☐ EDGY
 TEMP **20** BEST LAP _____ BEST RESULT _____ QUALIFYING POS. _____ FINAL POS. _____

ENGINE _____	CLUTCH _____	FRONT DIFF OIL 12 ☒	OIL QUANTITY(gr) 2.7 ☒	DIFF GEAR 14 ☒
PLUG _____	CLUTCH SHOES _____	CENTER DIFF OIL 10 ☒	OIL QUANTITY(gr) 6 ☒	DIFF PINION 45 ☒
PIPE _____	CLUTCH SPRINGS _____	REAR DIFF OIL 6 ☒	OIL QUANTITY(gr) 2.7 ☒	SPUR GEAR 49 ☒
FUEL _____	RUNTIME _____			CLUTCH BELL 13 ☒

SHOCKS

	FRONT	REAR
OIL	550 ☒	550 ☒
PISTON	7x1.3 ☒	7x1.4 ☒
SPRING	Black ☒	Brown ☒
LENGTH	102.5 ☒	119 ☒
VISIBLE SHAFT LENGTH		
REBOUND	min ☒	min ☒
FRONT SHOCK	☒ LONG	SHOCKS ☒ EMULSION
END	☐ SHORT	TYPE ☐ BLADDER
NOTES	20deg oils: 5x1.5/5x1.5 - 600/450 6x1.3/6x1.4 - 500/450 7x1.3/7x1.4 - 550/550 8x1.2/8x1.3 - 550/500	


FRONT END

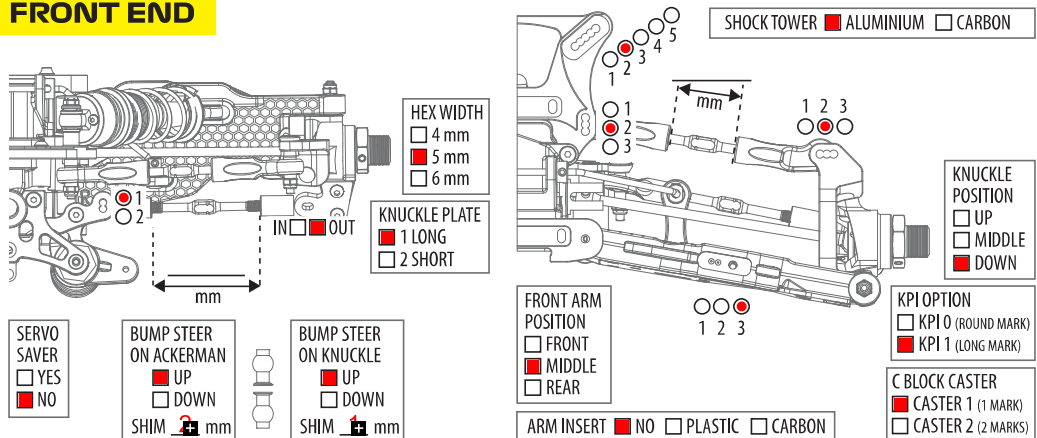

CHASSIS


	FRONT	REAR
CAMBER	-1 ☒	-2 ☒
RIDE HEIGHT	25 ☒	27 ☒
DOWNTRAVEL (WITH TYRES)		
DOWNTRAVEL (on 36mm blocks)		
ANTI ROLL BARS	2.3 ☒	2.5 ☒
BRAKE BALANCE	50 ☒	50 ☒
ENGINE MOUNT	☐ FORWARD (+2mm) ☒ BACKWARD (-2mm)	☒ SHORT ☐ LONG
THROTTLE	☒ SHORT	
SERVO MOUNT	☐ LONG	WEIGHT _____

REAR END

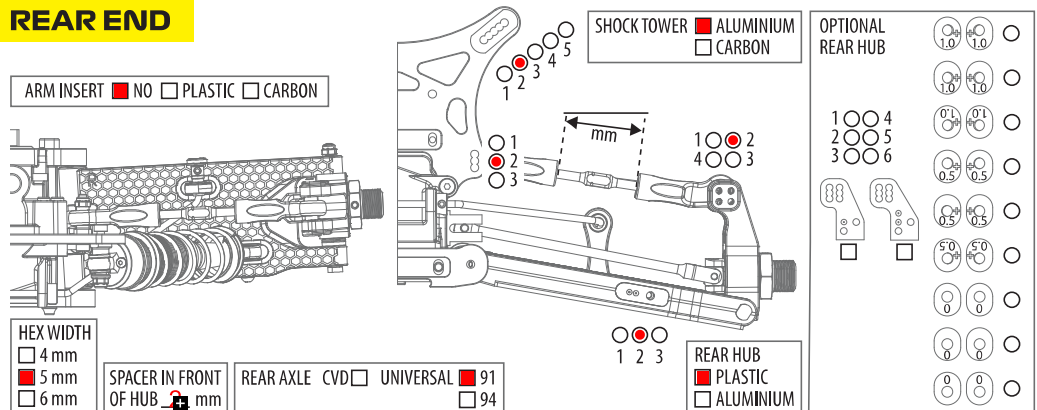

TYRES

	FRONT	REAR
BRAND		
TREAD		
COMPOUND		
WHEELS		
INSERTS		
GLUED TO WHEEL	☐ YES ☒ NO	☐ YES ☒ NO

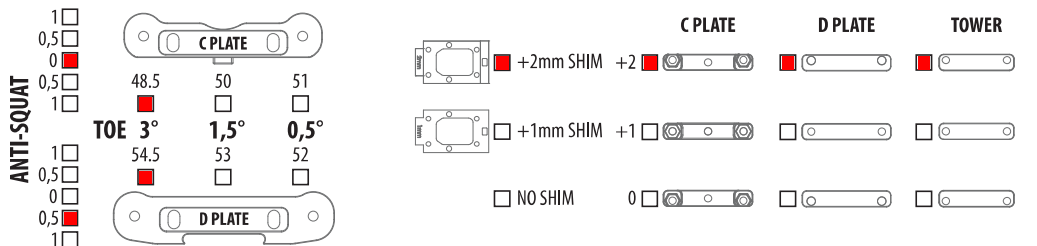

RADIO SETTINGS

	THROTTLE	STEERING
DUAL RATE		
SPEED		
EXPO		
SERVO MODEL		
	THROTTLE	BRAKE
ELECTRIC EPA		

BODY & WING

BODYSHELL **Mayako Stock** ☒

WING BRAND **Mayako** ☒

WING MODEL **1.0** ☒

WING POSITION ☐ 1 ☐ 2 ☒ 3 ☐ 4
 1 IS FRONT HOLE (WING BACK)

WING FLAPS ☐ BIG ☐ SMALL ☐ BOTH

NOTES

Middle holes in production towers (3 hole tower)
 Run +1deg front toe (5mm difference front to rear of tyre)