

## SETUP SHEET


### TRACK CONDITIONS

Type: ☒ Carpet ☐ Asphalt  
Place: ☐ Indoor ☐ Outdoor  
Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Size: ☐ Open ☒ Med. ☐ Tight  
Traction: ☐ High ☒ Med. ☒ Low  
Track Temp/Air Temp: 20° / 20°  
Note: \_\_\_\_\_


### FRONT SUSPENSION

Track Width: 186 mm ☐ Gear Diff \_\_\_\_\_ wt  
Toe Angle: +10° ☐ Ball Diff  
Caster: 4° ☐ One Way  
Camber: -2° ☒ Spool  
Ride Height: 5 mm Anti-Roll Bar: Ø 1,3 mm  
Down Stop: 6,2 mm

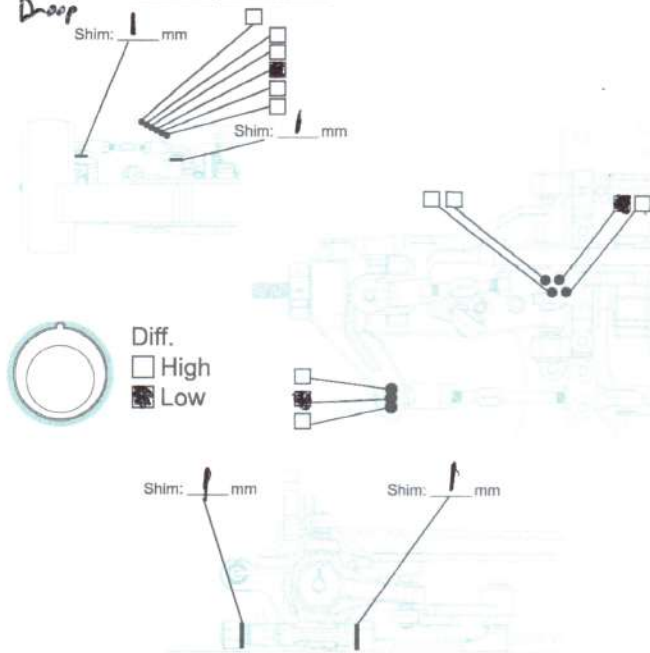

### REAR SUSPENSION

Track Width: 189 mm ☒ Gear Diff 4000 wt  
Toe Angle: -3° ☐ Ball Diff  
Camber: -2° ☐ Spool  
Ride Height: 5,2 mm  
Down Stop: 4,8 mm Anti-Roll Bar: Ø 1,2 mm

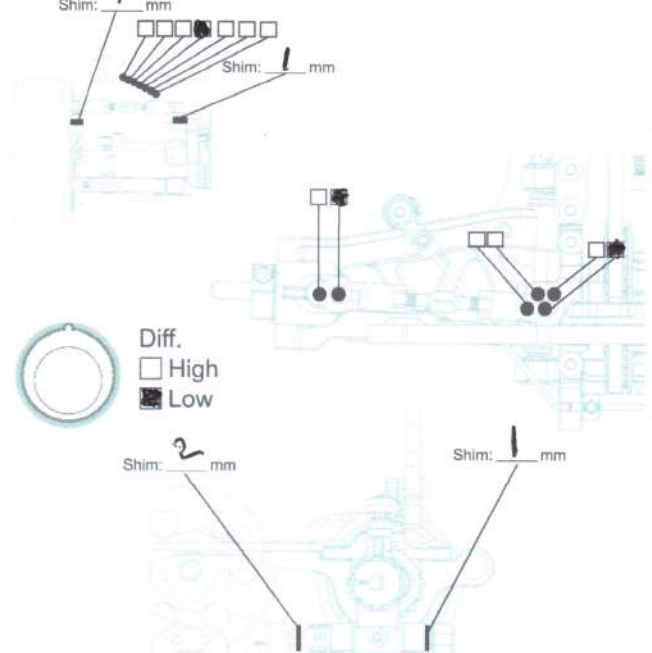

### ARM HOLDERS

(+) (-) (-) (-) (+)  
FFL 0,2 FFR 0,2  
FRL 0,4 FRR 0,4

(+) (-) (-) (-) (+)  
RFL 0,4 RFR 0,4  
RRL 0,2 RRR 0,2

### ELECTRONICS


Servo: Savox  
ESC: Hobbywing  
Battery: LRP 5600

### DRIVE RATIO


Spur 100  
Pinion 38  $\frac{T}{T} \times 1.9 = 5,0$

### TIRES

Insert: \_\_\_\_\_  
Wheel: \_\_\_\_\_  
Shore/deg: \_\_\_\_\_  
Compound: \_\_\_\_\_  
Tire Temp: \_\_\_\_\_  
Tire additive: \_\_\_\_\_  
Treated Area



### SHOCKS



Hole Size: F 1,1 R 1,1  
Holes In Piston: F 3 R 3  
Oil wt: F 400 R 400  
Springs: F 12-factor 22 R 12-factor 25  
Rebound: F No R No  
Bladder Note: \_\_\_\_\_  
Thread Length: F \_\_\_\_\_ R \_\_\_\_\_

### BODY



Body: \_\_\_\_\_  
Wing Height: \_\_\_\_\_  
Wing Position: \_\_\_\_\_

### MOTOR

Brand: rcds  
Turns: 13,5  
Timing: 320

### ESC

Punch: \_\_\_\_\_  
Initial Brake: \_\_\_\_\_  
Drag Brake: \_\_\_\_\_  
☐ ESC Timing ☐ Turbo Timing  
Blinking