

SETUP SHEET


TRACK CONDITIONS

Type: ☐ Carpet ☒ Asphalt
Place: ☐ Indoor ☒ Outdoor
Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Size: ☒ Open ☐ Med. ☐ Tight
Traction: ☐ High ☐ Med. ☒ Low
Track Temp/Air Temp: 22° / 19°
Note: Regen


FRONT SUSPENSION

Track Width: 186 mm ☐ Gear Diff _____ wt
Toe Angle: +10° ☐ Ball Diff
Caster: 4° ☐ One Way
Camber: -1° ☒ Spool
Ride Height: 5,6 mm Anti-Roll Bar: 0 NO mm
Down Stop: 7,2 mm

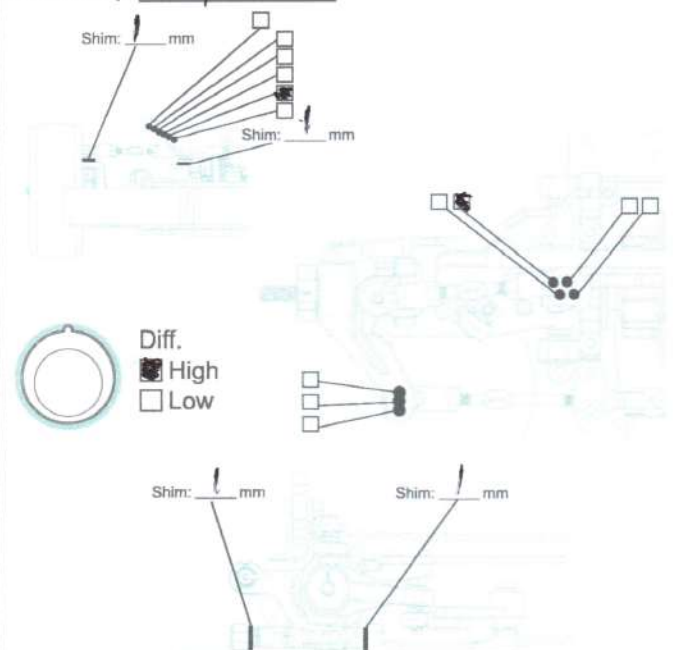

REAR SUSPENSION

Track Width: 189 mm ☒ Gear Diff 1000 wt
Toe Angle: -3° ☐ Ball Diff
Camber: -1° ☐ Spool
Ride Height: 5,2 mm
Down Stop: 6,4 mm Anti-Roll Bar: 0 NO mm

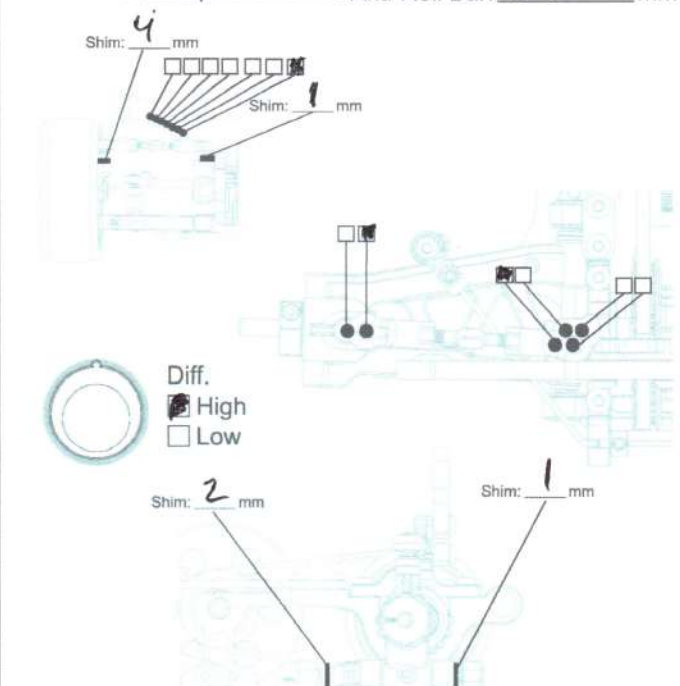

ARM HOLDERS

(+) (-) (-) (-) (+)
FFL 0,2 FFR 0,2
FRL 0,4 FRR 0,4

(+) (-) (-) (-) (+)
RFL 0,4 RFR 0,4
RRL 0,2 RRR 0,2

ELECTRONICS


Servo: Servo
ESC: Hobbywing
Battery: GPR 5600

DRIVE RATIO


Spur 100
Pinion 38 $\frac{T}{T} \times 1.9 = 5,0$

TIRES

Insert: _____
Wheel: _____
Shore/deg: _____
Compound: _____
Tire Temp: _____
Tire additive: _____
Treated Area



SHOCKS



Hole Size: F 1,1 R 1,1
Holes In Piston: F 3 R 3
Oil wt: F 400 R 400
Springs: F 29 R 30
Rebound: F No R No
Bladder Note: _____
Thread Length: F _____ R _____

MOTOR

Brand: Reds
Turns: 13,5
Timing: 320

ESC

Punch: _____
Initial Brake: _____
Drag Brake: _____
☐ ESC Timing ☐ Turbo Timing
Blinks

BODY



Body: _____
Wing Height: _____
Wing Position: _____