

SETUP SHEET


TRACK CONDITIONS

Type: ☐ Carpet ☒ Asphalt
 Place: ☐ Indoor ☒ Outdoor
 Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Size: ☒ Open ☐ Med. ☐ Tight
 Traction: ☒ High ☐ Med. ☐ Low
 Track Temp/Air Temp: 35° / 30°
 Note: _____


FRONT SUSPENSION

Track Width: 186 mm ☐ Gear Diff _____ wt
 Toe Angle: +6° ☐ Ball Diff
 Caster: 40 ☐ One Way
 Camber: -2 ☒ Spool
 Ride Height: 5 mm Anti-Roll Bar: 0.13 mm
 Down Stop: 6.2 mm


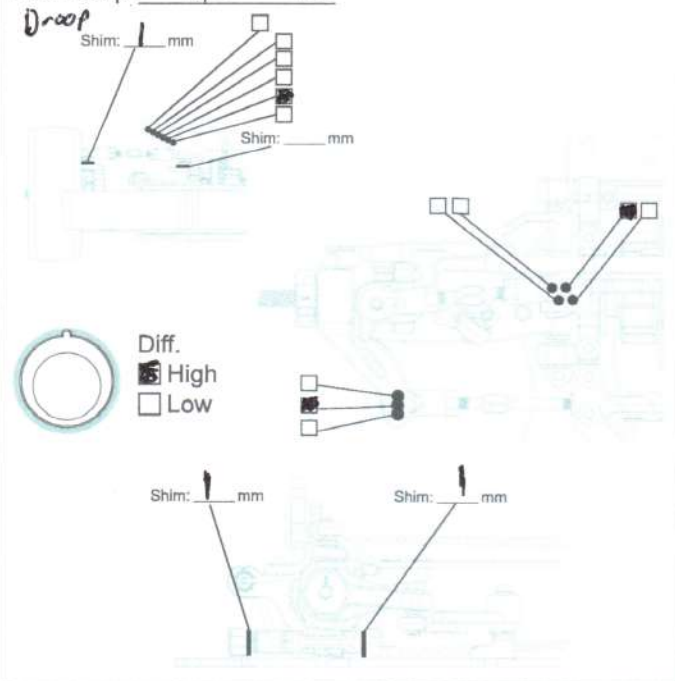


REAR SUSPENSION

Track Width: 189 mm ☒ Gear Diff 6000 wt
 Toe Angle: -20° ☐ Ball Diff
 Camber: -20° ☐ Spool
 Ride Height: 5.2 mm
 Down Stop: 4.8 mm Anti-Roll Bar: 0.12 mm

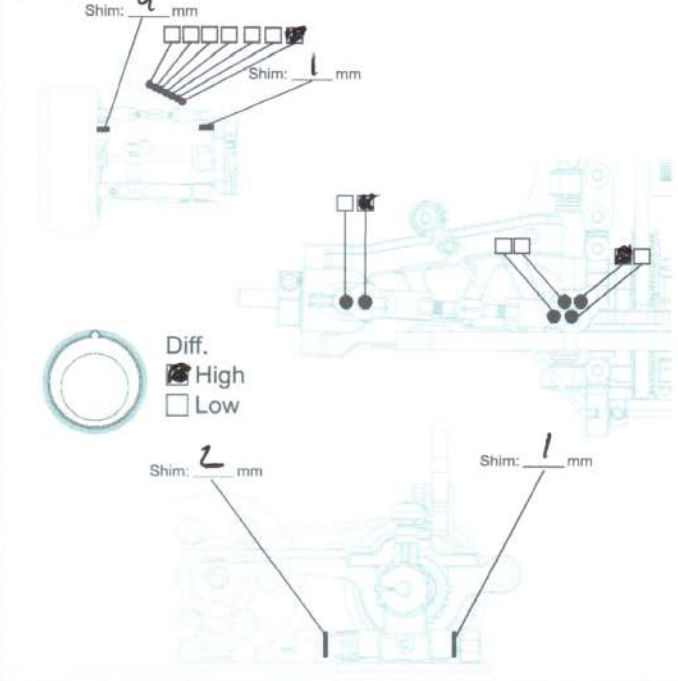

ARM HOLDERS

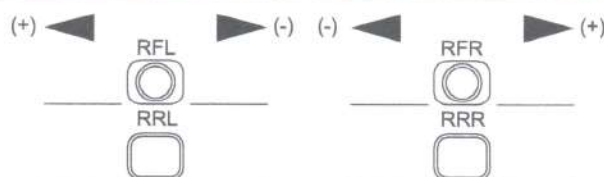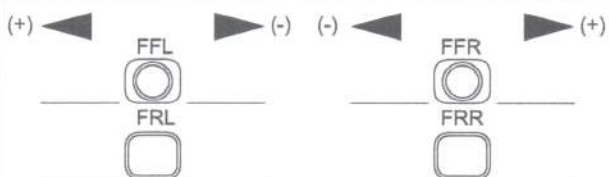

ELECTRONICS


Servo: Servo
 ESC: Hoobgwing
 Battery: LRP 5600

DRIVE RATIO


Spur 100 T
 Pinion 38 T x 1.9 = 5.0

TIRES

Insert: _____
 Wheel: _____
 Shore/deg: _____
 Compound: _____
 Tire Temp: _____
 Tire additive: _____
 Treated Area



SHOCKS



Hole Size: F 1.1 R 1.1
 Holes In Piston: F 3 R 3
 Oil wt: F 400 R 400
 Springs: F 29 R 23
 Rebound: F NO R NO
 Bladder Note: _____
 Thread Length: F _____ R _____

MOTOR

Brand: Red's
 Turns: 13.5
 Timing: 32°

ESC

Punch: _____
 Initial Brake: _____
 Drag Brake: _____
☐ ESC Timing ☐ Turbo Timing
 Blinking

BODY



Body: _____
 Wing Height: _____
 Wing Position: _____