

Name: _____
Date: _____
Track: _____


Track conditions

Size: ☐ Open ☐ Med. ☐ Tight
Traction: ☐ High ☐ Med. ☐ Low
Surface: ☐ Smooth ☐ Med. ☐ Bumpy


Result

Race time / Lap: _____
Best lap (1Lap): _____

Front suspension

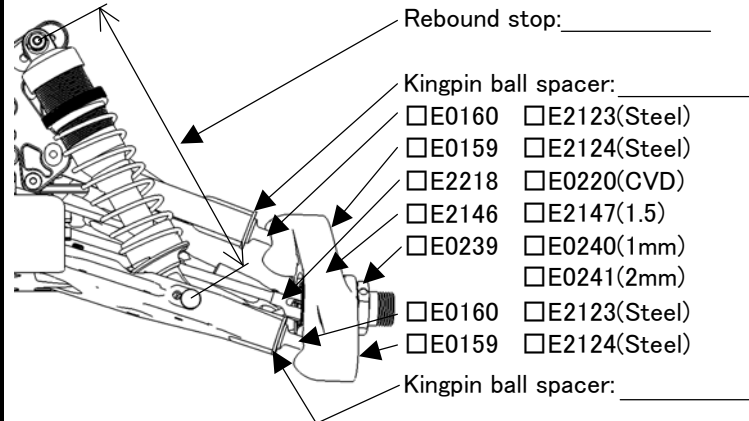


Upper arm position:

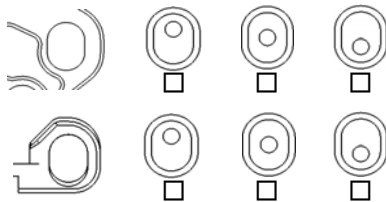

Ride height: _____
Toe angle: _____
Lower arm plate: ☐ E2144A,B
☐ E2154(CFRP 1mm)
☐ E2155(CFRP 1.2mm)
Anti roll bar: _____
Upper arm spacer: _____
Lower arm spacer: _____


Lower arm position (Kick up):

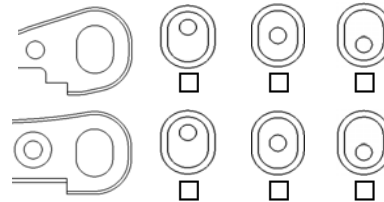

Front shocks

Piston: _____ Oil: _____
Spring: _____
Shock position: _____
Pivot ball position: ☐ Front ☐ Rear
Damper stay: ☐ E2562(Aluminum)
☐ E2565(CFRP)

Steering ackerman




Front upper plate

☐ E2148D ☐ E2158(CFRP)


Servo saver arm

☐ E2301A ☐ E2310(Aluminum)

Rear suspension

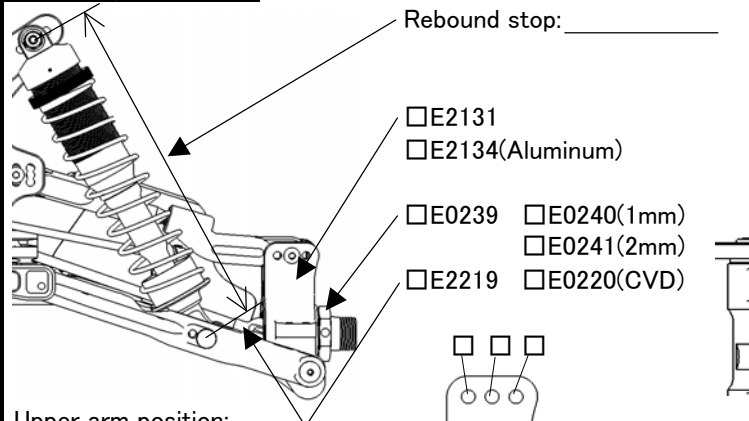

Upper arm position:

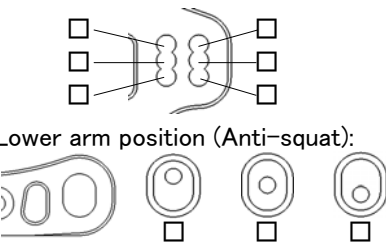


Lower arm position (Anti-squat):



Ride height: _____
Camber angle: _____
Lower arm plate: ☐ E2145A,B
☐ E2156(CFRP 1mm)
☐ E2157(CFRP 1.2mm)
Anti roll bar: _____
Lower arm spacer: _____
Upright spacer: _____

Lower arm position (Toe angle):

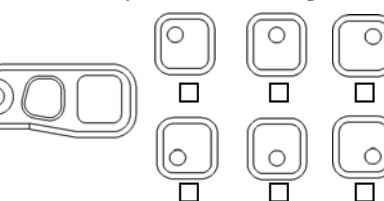

Rear shocks

Piston: _____ Oil: _____
Spring: _____
Shock position: _____
Pivot ball position: ☐ Front ☐ Rear
Damper stay: ☐ E2563(Aluminum)
☐ E2566(CFRP)

Center shaft

☐ E0223,E0259 ☐ E2228,E2229

Tension rod

Front: ☐ E2107A(Long) ☐ E2107B(Short)
Rear: ☐ E2148C ☐ E0803(Rubber)

Weight



Engine

Type: _____ Plug: _____ Reducer: _____
Muffler: _____ Fuel: _____ Gasket: _____
Engine mount: ☐ E0701(Standard) ☐ Other _____

Diff. Gear

Front: ☐ 44/13T ☐ 42/12T
Rear: ☐ 44/13T ☐ 42/12T
Center: ☐ 44T ☐ 46T
☐ 47T ☐ 48T

Tires

Front


Rear

Type: _____
Compound: _____
Inserts: _____
Wheel: _____

Clutch

☐ 3P ☐ 4P
Clutch bell: ☐ 13T ☐ 14T
Clutch shoes ☐ C0754 ☐ E0704 ☐ E0710 ☐ E2706
Clutch spring ☐ 0.8 ☐ 0.9 ☐ 0.95 ☐ 1.0 ☐ 1.05 ☐ 1.1

Body/Wing

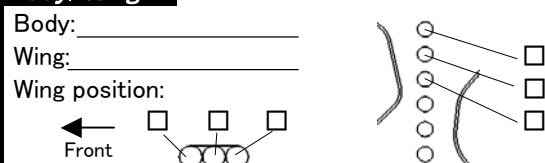

Comments

